


TOOLS REQUIRED ▶



1/8" HEX WRENCH




7/16" DRILL SOCKET BIT

FOR USE WITH THE VALLEY INDUSTRIES HEAVY HAULER™ 3-POINT UTILITY CARGO BOX


INCLUDED COMPONENTS ▼




Steel Bracket (1)
31-300077



Self-Tapping Screw (1)
33-200131



Fender Washer (1)
33-300106




Small Quick Grip Fist (2)
33-300109



Flat Washer (1)
33-103131



Nylock Nut (10)
33-300105



1" Hex Screws (2)
33-200030

LARGE TOOL HOLDER ASSEMBLY

1. PARTS

TOOLS

Note: The Steel Bracket will have a clinch nut embedded for Large Quick Grip Fist to be screwed in.

Adds First Quick Grip Fist to Steel Bracket

With an Allen Wrench, install Small Quick Grip Fist, 1" Hex Screw, Nylock Nut, and Flat Washer into the top open hole on the frontside of the Steel Bracket.

Repeat step for remaining Small Quick Grip Fist.

2. PARTS


TOOLS

None

Note: Before installation, make sure hole of Steel Bracket is lined up with one of the rows of diamond holes of Cargo Box.


Seat Steel Bracket on Rail of Cargo Box.

Attaches Steel Bracket to Cargo Box



3.

PARTS



WARRANTY


The Heavy Hauler 3-Point Cargo Box Small Tool Holder manufactured by Valley Industries is warranted for 1-year from date of shipment when properly assembled, installed, maintained, and operated. The warranty will cover only manufacturer and workmanship defects.

Valley Industries will not be liable for any consequential, incidental, or indirect damages from any cause whatsoever.

Not Covered Under Warranty:


- Normal wear and tear that have been subjected to accident, abuse, misapplication, improper assembly, improper installation or improper maintenance.
- Components and equipment not manufactured by Valley Industries.

TOOLS

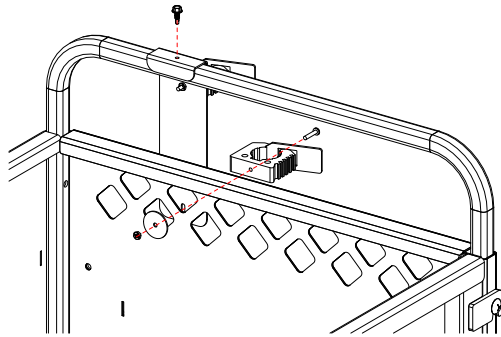

Remove cinch nut from the bottom hole of the Steel Bracket. Insert 1" Hex Screw through Small Quick Grip Fist, Steel Bracket, and Cargo Box.

Secures Steel Bracket to Cargo Box




Install Fender Washer and Cinch Nut onto 1" Hex Screw. Tighten down with 1/8" Allen Wrench.


With 7/16" Drill Socket Bit, install Self-Tapping Screw through the top open hole of the Steel Bracket and through the Rail of Cargo Box.

OTHER ACCESSORIES


SOLD SEPARATELY




Chainsaw Holder
CB-ACC-SH




Yard Tool Holders
CB-ACC-YT




Front Storage Pockets
CB-ACC-FP




5 Gallon Pail Holder
CB-ACC-PH




Load Extension Bars
CB-ACC-EB



Side Storage Pockets
CB-ACC-SP



Single Large Yard Tool Holder
CB-ACC-LY



Layer Rails
CB-ACC-LR